




GEAR PUMP 2 CAST IRON

*Amboretto
Corporation*

GEAR PUMP 2 CAST IRON



Dimensional Drawing

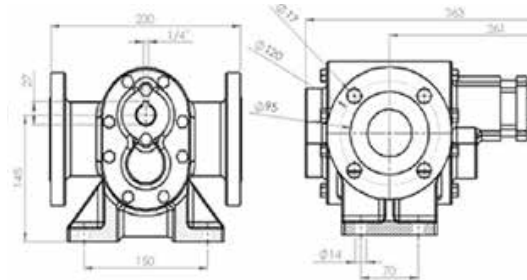

CAPACITY

- Maximum Flow: 16,000 liters/hour
- Maximum Pressure: 15-bar
- Maximum Rotation: 1750-RPM
- Viscosity: From 0,5 up to 200,000 cSt
- Maximum Temperature: Up to 350°C

CHARACTERISTICS

- Flanged suction and retaining nozzles Ø 2" (Norm ANSI B16.1 150 lbs);
- Gears helical teeth or spurs;
- Gasket or mechanical seal;
- Sliding bearings in self-lubricating bushings;
- Construction in cast iron, stainless steel, carbon steel or special materials for applications according to customer specification.

APPLICATIONS

- Pumping and transfer of fluids in general;
- Lubrication systems;
- Filtration systems;
- Supply units;
- Loading and unloading of tank trucks coupled to the power take-off
- Fluid circulation and recirculation systems;
- Feeding systems for lines, machinery and equipment;
- Dosing in industrial processes;
- Drainage of fluids;
- Systems of refrigeration of machinery and equipment;
- Hydraulics machinery and equipment in general;

OPTIONAL

- Integrated relief valve; Bearing housings;
- Option for threaded suction and retaining nozzles
- Construction in special materials for specific applications
Coupling; Motor-Pump Set

FLOW TABLE

RPM, FLOW AND POWER		BOOSTER PRESSURE (KG/CM ²)												
		0	2	4	6	8	10	12	14	16	18	20	22	
1750 RPM	FLOW	liters/hour	16000	15992	15985	15977	15962	15959	15941	15934				
		liters/minute	266.7	266.5	266.4	266.3	266.0	266.0	265.7	265.6				
		HP	5.00	5.00	5.00	7.50	7.50	10.00	12.50	12.50				
1150 RPM	FLOW	liters/hour	12100	12053	12000	11996	11983	1 974	11966	119511				
		liters/minute	201.7	200.9	200.0	199.9	199.7	199.6	199.4	199.2				
		HP	5.00	5.00	5.00	7.50	7.50	10.00	12.50	12.50				
850 RPM	FLOW	liters/hour	8340	8333	8327	8314	8306	8291	8284	8272				
		liters/minute	139.0	138.9	138.8	138.6	138.4	138.2	138.1	137.9				
		HP	5.00	5.00	5.00	7.50	7.50	10.00	12.50	12.50				



www.amborettoamericas.com

Amboretto
Corporation